

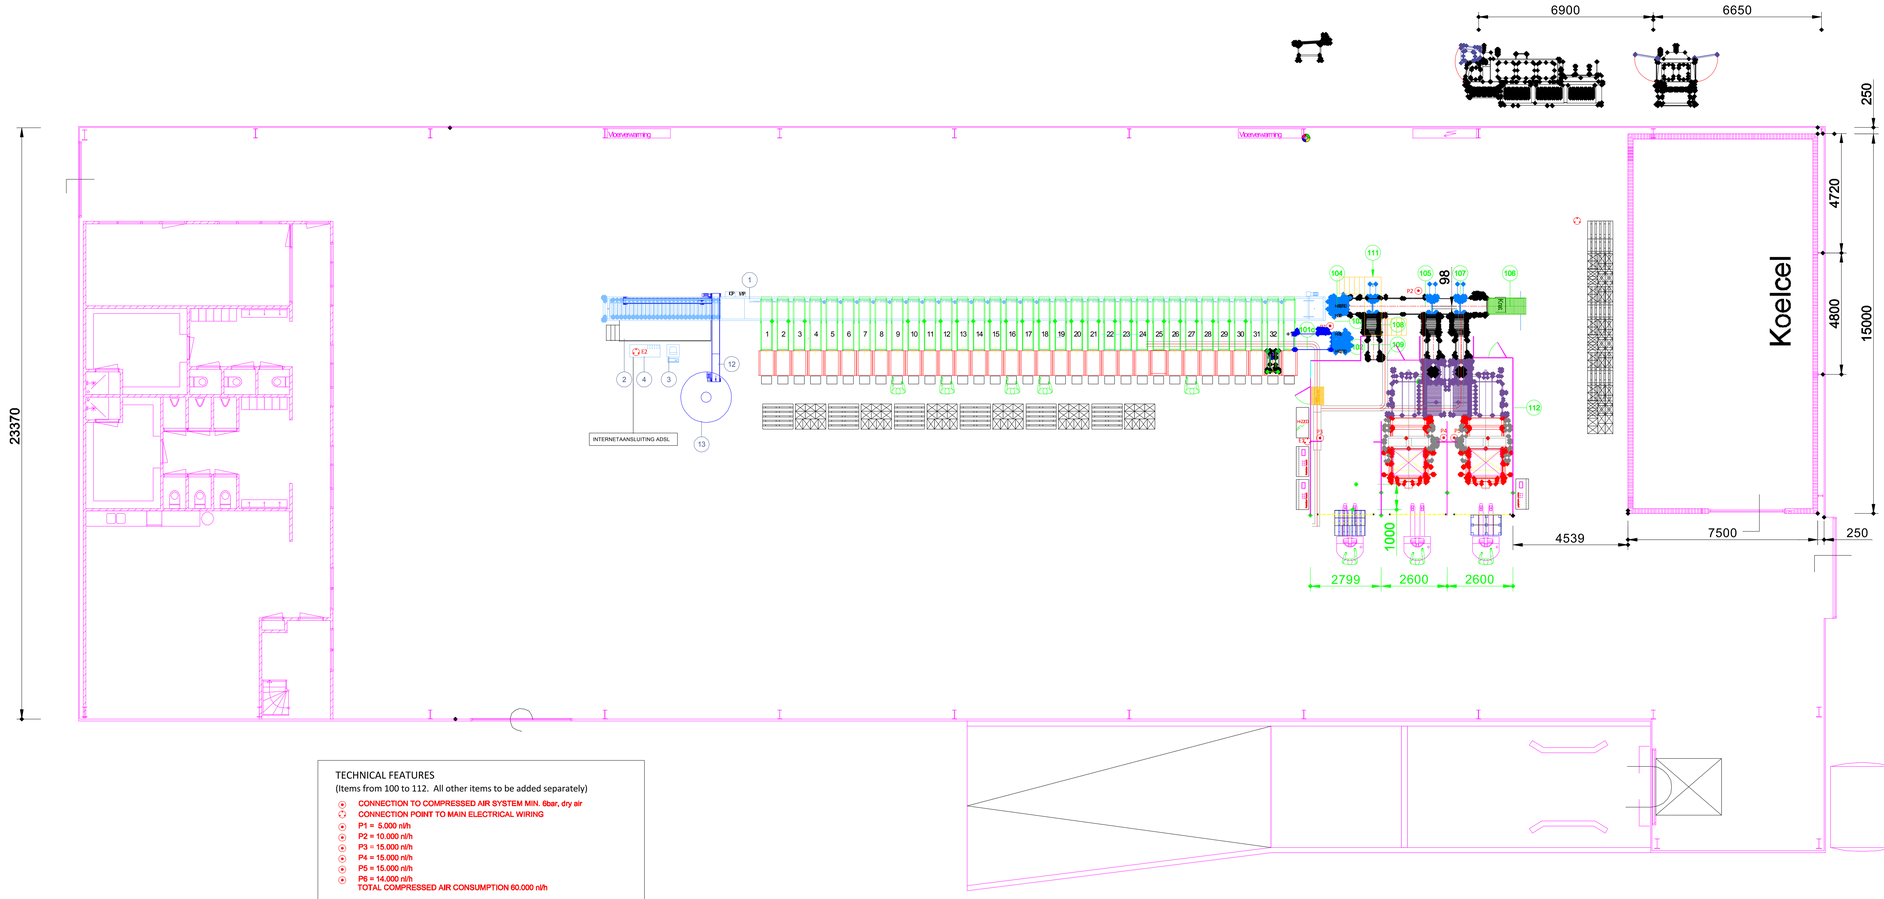

TECHNICAL FEATURES
(Items from 100 to 112. All other items to be added separately)

- CONNECTION TO COMPRESSED AIR SYSTEM MIN. 6bar, dry air
- CONNECTION POINT TO MAIN ELECTRICAL WIRING
- P1 = 5.000 n/h
- P2 = 10.000 n/h
- P3 = 15.000 n/h
- P4 = 15.000 n/h
- P5 = 15.000 n/h
- P6 = 14.000 n/h
  TOTAL COMPRESSED AIR CONSUMPTION 60.000 n/h
- E1 = 25 kW
- E2 = 11 kW, 35A
- E3 = 12 kW
- Reference point for installation



Country:	NEDERLAND
Product:	AUBERGINE
Average weight:	225-500 gram
Capacity:	15.000 stuks/uur

AUBERGINEKWEKERIJ DE JONG

Title: GS 1-32 + PALLETIZATION

AWETA
GRADING & PACKING
Burg. Winkellaan 3
Postbus 17
2630 AA NOOTDORP (NL)
Tel. +31 (015) 310 99 61
Telefax +31 (015) 310 73 21
Email: aweta@aweta.nl

Drawn by:	AS	Date:	28-03-2011
Changed by:	CB	Date:	1-12-2011
Scale:	1:100	Size:	A1
Drawing number:	GS32-1102		R11

All rights exclusively reserved by AWETA B.V. Multiplication in any form is not permitted without the written authorization of AWETA B.V.