



**The best solution
for the horizontal
strapping of the pallets**




2800

Horizontal semiautomatic strapping machine for pallets


Easy to use. The machine can be placed beside the stacked pallet, avoiding the need to move the load. Battery operation optional.

- Designed and manufactured using highest quality components.
- Aluminium head set and tension roller treated ensures long life of the machine.
- Tension electronically adjustable through a magnetic clutch to get the strongest tension without any physical effort.
- Strapping height manually adjustable without effort. Allows strap from 17 cm. from the floor up to 2 m.
- It helps putting edge protectors while first strapping.
- More than 300 machines working mainly in fruit and vegetable (producers') warehouses since 1994.

The pallet is strapped and stabilised before moving the load.

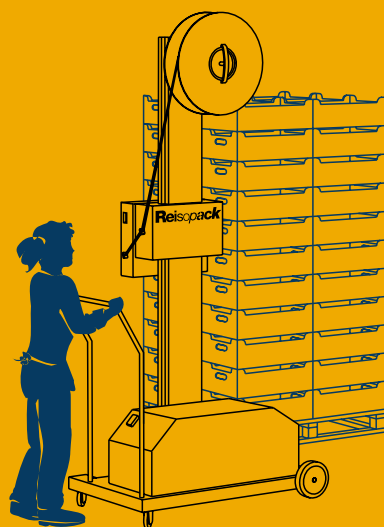

This simple system assists edge protector placement on the first strap.

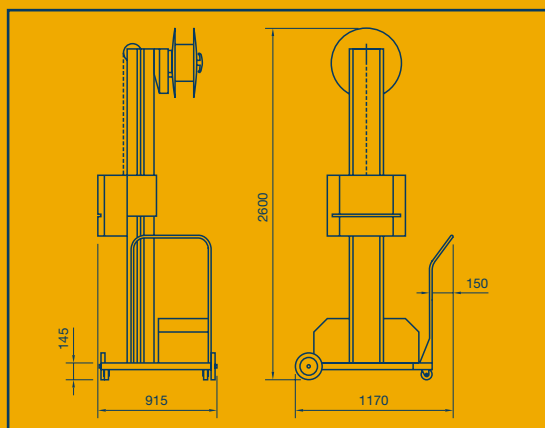

CHARACTERISTICS

- VOLTAGE:** 220 V / 240 V · 50 / 60 Hz. Single phase.
- ELECT. CONSUMPTION:** 1 Kw. **APROX. PRODUCT:** 20-30 pallets / hour.
- BATTERY DURATION:** 600 straps.
- PACKAGING DIMENSIONS:** 2 packages (350 Kg.).
- 110 X 110 X 84 cm. / 245 X 78 X 65 cm.

TECHNICAL SPECIFICATIONS

- STRAP WIDTH:** 6-8-12-15,5 mm. (Factory set).
- STRAP THICKNESS:** 0,50-0,85 mm.
- HEATING SYSTEM:** Electrical heating.
- Heating temperature and cooling time adjustable.
- OPTIONS:** Battery including recharge system.

01/04 Edition -We reserve the right to made any modification without prevention.

Reisopack s.l.

Polígono Industrial "Z"
C/ De la Premsa, 3
08150 Parets del Vallès (Spain)

Tel. 902 153 448 - Fax 935 624 186
<http://www.reisopack.com>
E-mail: reiso@reisopack.com